



415 KN - One Column Swaging Machine

Our 40t Press is particularly suitable for use as a benchtop press for smaller components and stands out thanks to its high reliability and simple operation.

It is capable of pressing aluminium ferrules in a single bite up to:

- **ZEN[®] 8** (Form A, EN 13411-3)

Hydraulic Press 415 KN

Technical Data

Max. pressure capacity	415 KN
Max. piston stroke	26 mm
Max. oil pressure	400 bar
Dimensions (L x W x H)	635 x 352 x 556 mm
Weight	185 kg
Oil capacity	10 L
Max. swaging dies (W x H)	50 x 48 mm
Stroke speed	5,7 mm/s
Reversing speed	8,5 mm/s
Foot switch	✓
Power supply	3,2 KW / 400 V / 50 Hz


Other voltages on request!

We reserve the right to change technical data!





415 KN - One Column Swaging Machine

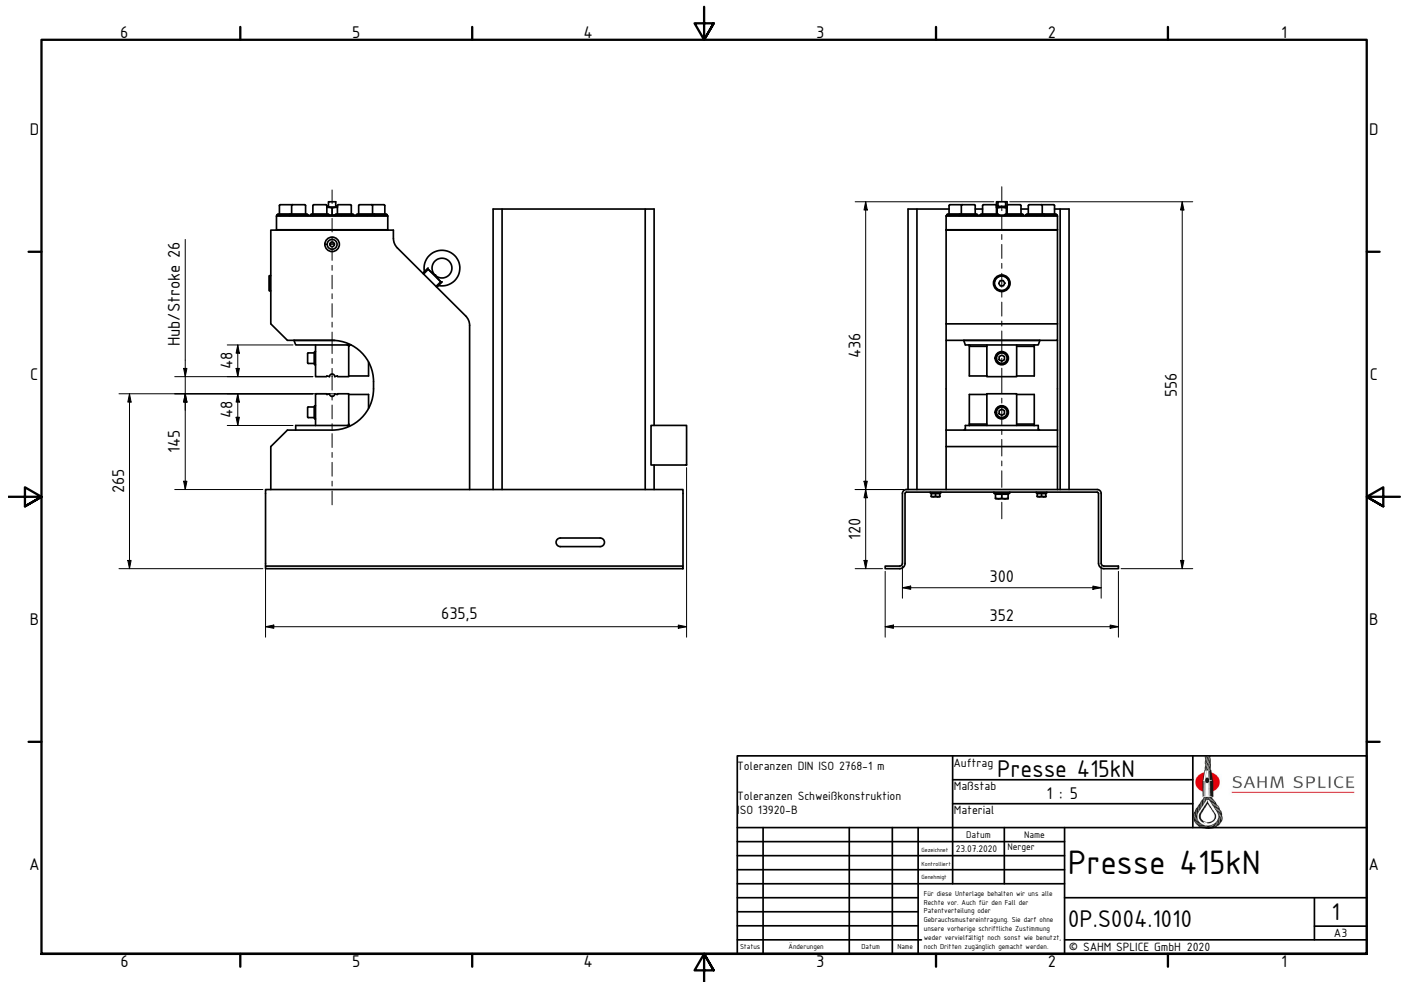

Toleranzen DIN ISO 2768-1 m		Auftrag Presse 415kN		
Toleranzen Schweißkonstruktion SO 13920-B		Maßstab 1 : 5		
		Material		
		Datum	Name	Presse 415kN
		23.07.2020	Nerger	
Für diese Driftfertige behalten wir uns alle Rechte vor. Auch für den Fall der Patentverletzung oder Gebrauchsmusterrechtsverletzung. Sie darf ohne unsere vorherige schriftliche Zustimmung weder vervielfältigt noch sonst wie benutzt. Nach Dritten zugunsten geschützt werden.				
Status	Änderungen	Datum	Name	0P.S004.1010
				1
				A3
				© SAHM SPLICE GmbH 2020