



12.500 KN - Ring Frame Swaging Machine

This swaging machine with its 12.500 KN pressing capacity is capable of pressing up to:

- ZEN[®] 52 (Form A, EN 13411-3), ZEN[®] 60 in Multi-bite
- Flemish Eye 76 (3")



Optional Rigging Arm.



Hydraulic Press 12.500 KN

Technical Data


Max. pressure capacity	12.500 KN
Max. piston stroke	100 mm
Max. oil pressure	370 bar
Dimensions (L x W x H)	2.160 x 877 x 1.978 mm
Weight	7.530 kg
Oil capacity	250 L
Max. swaging dies (W x H)	250 x 200 mm
With angle packing (W x H)	220 x 150 mm / 156 x 110 mm
Unloaded stroke speed (up to 2900 kN)	6,0 mm/s
Loaded stroke speed	1,65 mm/s
Reversing speed	9,7 mm/s
Operating height	1.236 mm
Stroke limit	smooth, electronic control
Automatic control	✓
Foot switch	✓
Power supply	22 KW / 400 V / 50 Hz

Other voltages on request!

We reserve the right to change technical data!



12.500 KN - Ring Frame Swaging Machine

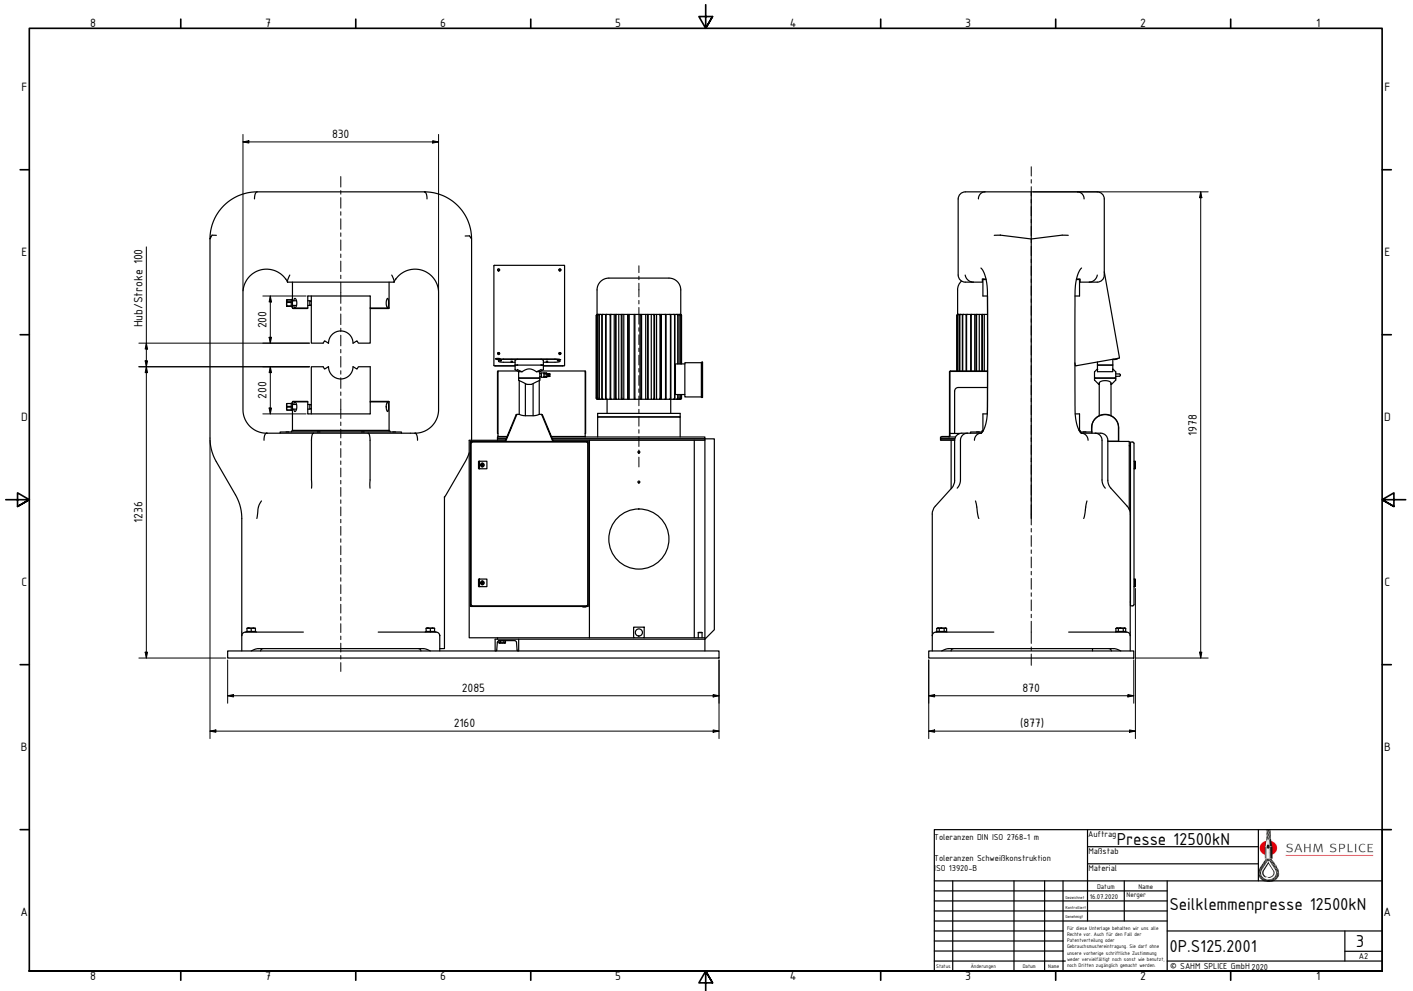

Toleranzen DIN ISO 2768-1 m		Auftrag Presse 12500kN		
Toleranzen Schweißkonstruktion ISO 15920-B		Maßstab		
		Material		
		Seilklemmenpresse 12500kN		
		OP.S125.2001		3
		© SAHM SPLICE GmbH 2020		A2